
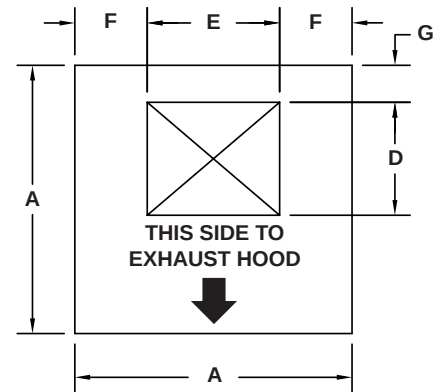


MODEL KS - Roof Supply Unit Filtered

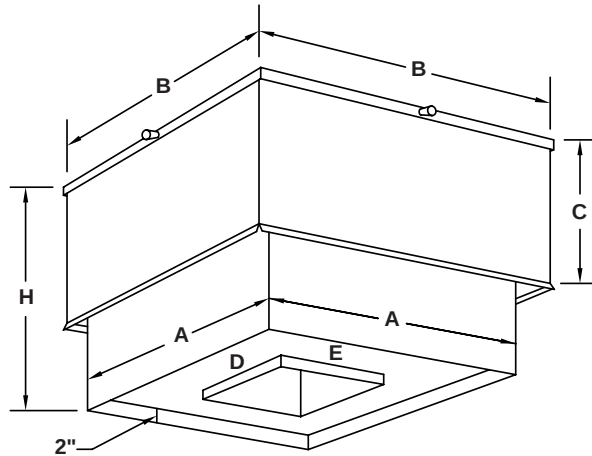

Model Number	Unit Dimensions (Inches)								Filters - 1 In.	Roof Curb O.D.	Wheels			Wgt.
	A	B	C	D	E	F	G	H			Dia.	Width	Outlet Area	
KS-10	26	36	16	11.50	13.00	6.50	5.00	28.50	(4) 16 x 20	25 x 25	10-5/8	10-5/8	1.015	150
KS-12	32	42	20	13.50	16.00	8.00	5.25	32.50	(4) 20 x 25	31 x 31	12-5/8	12-5/8	1.440	220
KS-15	32	42	20	16.00	19.00	6.50	5.25	32.50	(4) 20 x 25	31 x 31	15	15	2.010	220
KS-18	36	46	22	19.00	22.00	7.00	5.25	38.25	(4) 20 x 28	35 x 35	18-1/8	18	2.870	310
KS-20	46	60	24	24.75	22.75	10.50	6.00	48.00	(8) 20 x 20	45 x 45	20	18	3.880	540

Material: 18 gauge galvanized

						Motor Information				Tag
Qty.	Model	CFM	SP	BHP	RPM	HP	Volts	Phase	Enclosure	

Standard unit includes open drip NEMA frame ball bearing motor with adjustable V-drive mounted on rubber isolation; double width forward curved blower, and 1 inch washable aluminum filters. (All other type filters available.) Insulated hood is retained with quick release cover latches.

Options

- ☐ Aluminum Housing
 ☐ Hinged Cover
 ☐ Locking Hasp
 ☐ Disconnect Switch
- ☐ Painted Housing
 ☐ Motorized Damper Size _____ Voltage _____
- ☐ Paint Specifications: (Damper and actuator are shipped loose for field mounting.)
- ☐ Alternate Filters: _____
- ☐ Other Modifications: _____

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project	Location		
Engineer			
Architect	Dwg. No.	SD-KS	
Contractor	Date	08/06	



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com