

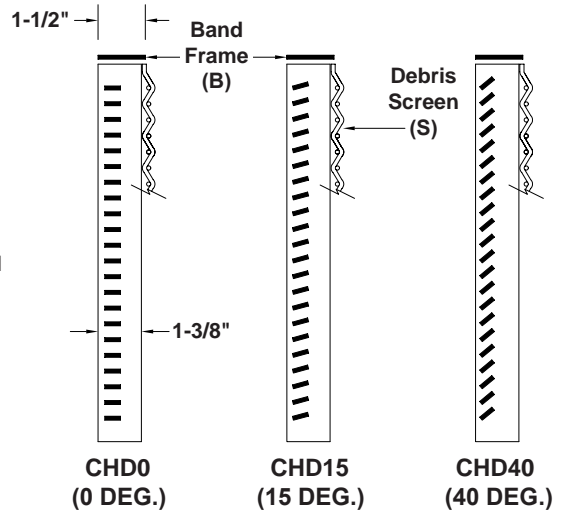


CHD - GRILLE CORES

OPTIONS

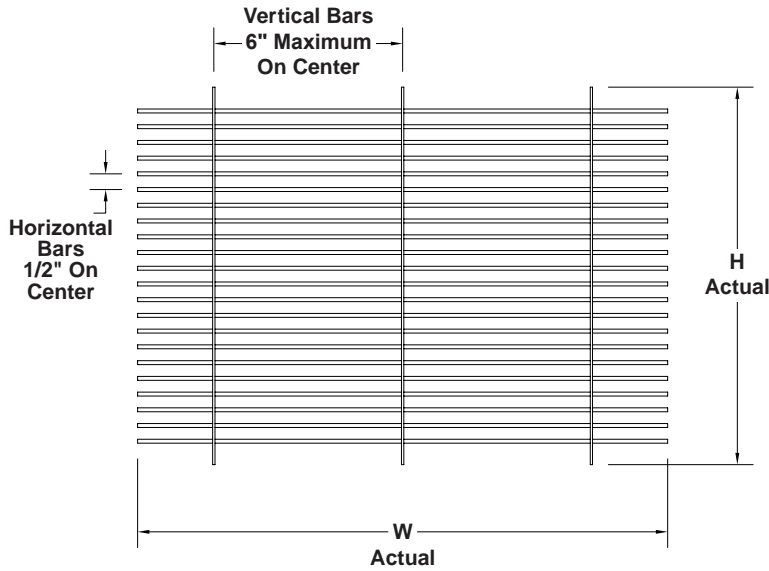

* Not available on 40 degree core.

CONSTRUCTION:

- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on 6 inch centers.
- Options: Blades at 0° (Designation CHD0), 15° (Designation CHD15) or 40° (Designation CHD40) deflection. Support bars on other centers.

STANDARD FINISHES:

- Steel - Two part polyurethane white.
- Aluminum - Mill finish.
- Stainless Steel - 304 or 316 mill finish.

OPTIONS (Suffix):

- B-Band frame around perimeter.
- G-Fastening lugs (0° and 15° only).
- S-Debris screen.
- Aluminum construction (.10")
- Stainless steel construction (12 ga.)
- Concealed mounting, Option G

OPTIONAL FINISHES:

- Two-part polyurethane white finish (stainless steel).
- Other paint finishes.
- Clear or bronze anodized. (aluminum only).
- Satin polish (stainless steel only).
- Mill finish (industrial grade) blades (stainless steel only).

Qty.	Actual O.D.		Deflection			Material	Other Options	Finish	Tag
	W	H	0°	15°	40°				

To maintain KEES' policy of continuous product improvement, we reserve the right to change prices, specifications, ratings or dimensions without notice or obligation.

Project		Location	
Engineer			
Architect		Dwg. No.	SD-CHD
Contractor		Date	02/10



KEES INC.
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com