
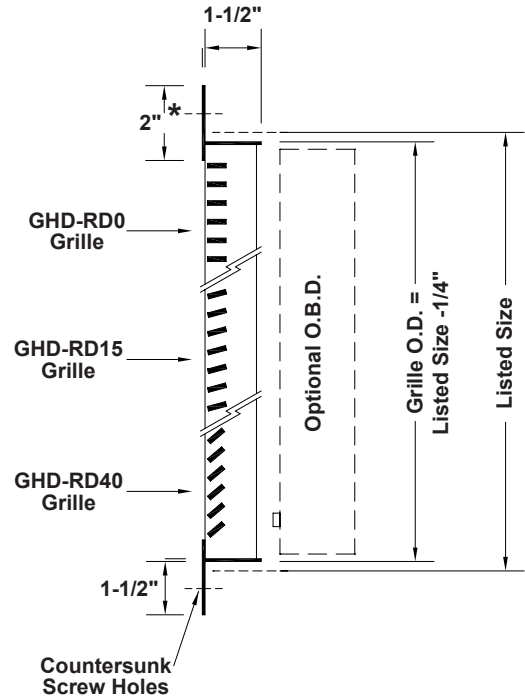


GHD-RD HEAVY DUTY BAR GRILLES

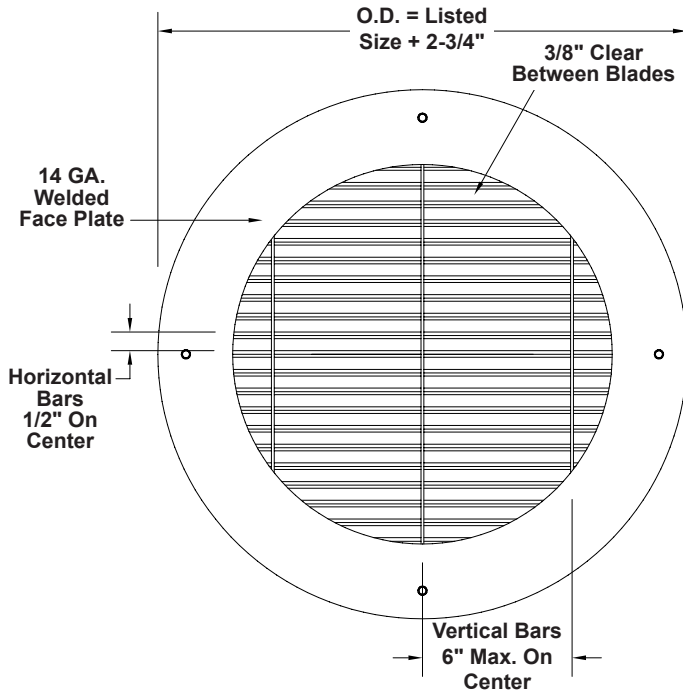

CONSTRUCTION:

- 14 gauge steel face plate.
Options: Face plate of any desired gauge.
- 1/8" x 1/2" horizontal blades on 1/2 inch centers penetrating 14 gauge vertical support bars on a maximum of 6 inch centers and welded to sleeve.
Options: Blades at 0° (Designation GHD-RD0), 15° (Designation GHD-RD15) or 40° (Designation GHD-RD40) deflection.
Support bars on other centers.
- Sleeve 14 gauge steel 1-1/2 inches long welded to face plate.
Options: Sleeve of any desired gauge.
- Countersunk screw holes on 10 inch centers approximately.

* 2-1/4" for 40° blade angle.

STANDARD FINISHES:

- STEEL - Two part polyurethane white
- ALUMINUM - (.10") Mill finish
- STAINLESS STEEL - (12 GA.) 304 or 316 satin finish.
(For architectural applications, see Architectural Round Bar Grille submittal.)

OPTIONS:

- Extended sleeve
- Opposed blade damper
- No screw holes
- Other paint finishes
- Mill finish (industrial grade) blades (stainless steel only)
- Clear or bronze anodized (aluminum only)
- Security screws

| Qty. | Listed Size Diameter | Deflection | | | Material | Damper | Other Options | Finish | Tag |
|------|----------------------|------------|-----|-----|----------|--------|---------------|--------|-----|
| | | 0° | 15° | 40° | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

| | | | | |
|-------------------|--|-----------------|------------------|--|
| Project | | Location | | |
| Engineer | | Dwg. No. | SD-GHD-RD | |
| Architect | | Date | 02/10 | |
| Contractor | | | | |



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com