
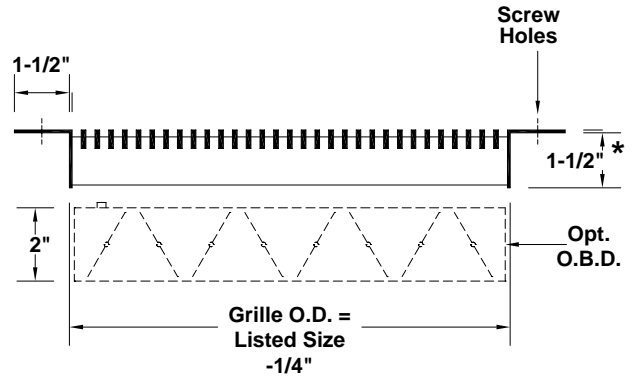


# FHD0 - ROUND FLOOR GRILLES

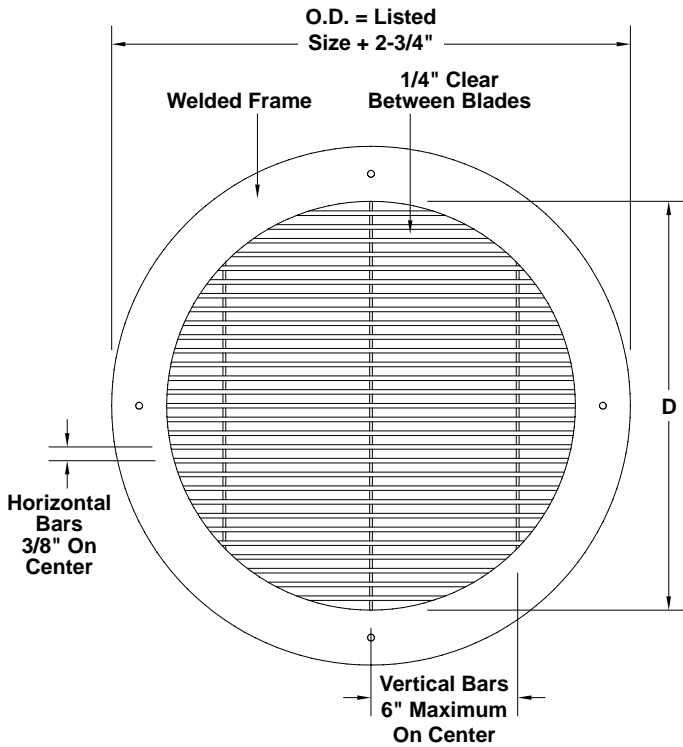

**STANDARD FEATURES:**

- 0° blade deflection is standard, specify Model FHD0.
- All welded, heavy construction.
- 1/8" x 1/2" horizontal blades, 3/8" centers supported by vertical bars on 6" centers. Other blade / support bar spacing available.
- Countersunk screw holes, maximum 10" centers and flat head screws are standard for surface mounting.

**STANDARD FINISH:**

- Aluminum - mill finish or white
- Stainless steel - 304 or 316 satin finish


\* 4" sleeve length with optional O.B.D.

\* 1-1/2" minimum sleeve length; grilles over 14" high may have extended sleeve as required.

**OPTIONS:**

- Aluminum construction (.125")
- Stainless steel construction (12 ga.)
- Extended sleeve
- Opposed blade damper
- No screw holes
- Concealed mounting, Option G
- Two-part polyurethane white finish (stainless steel)
- Other paint finishes
- Mill finish (industrial grade) blades (stainless steel only)
- Clear or bronze anodized (aluminum only)
- Security screws

**Mounting Option G  
Fastening Lugs**



Qty.	Listed Size - Diameter "D"	Damper	Screw Holes	Debris Screen	Material	Other Options	Finish	Tag

To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

<b>Project</b>		<b>Location</b>	
<b>Engineer</b>		<b>Dwg. No.</b> SD-FHDR	
<b>Architect</b>		<b>Date</b> 09/14	
<b>Contractor</b>			



**KEES INCORPORATED**  
 400 S. Industrial Dr.  
 Elkhart Lake, WI 53020  
 Phone: (920) 876-3391  
 Fax: (920) 876-3065  
 Website: www.kees.com