
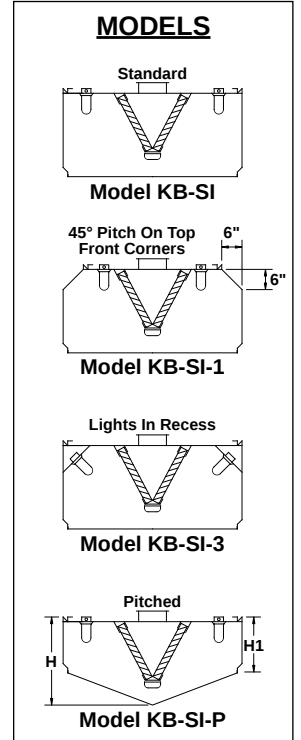


# MODEL KB SINGLE ISLAND

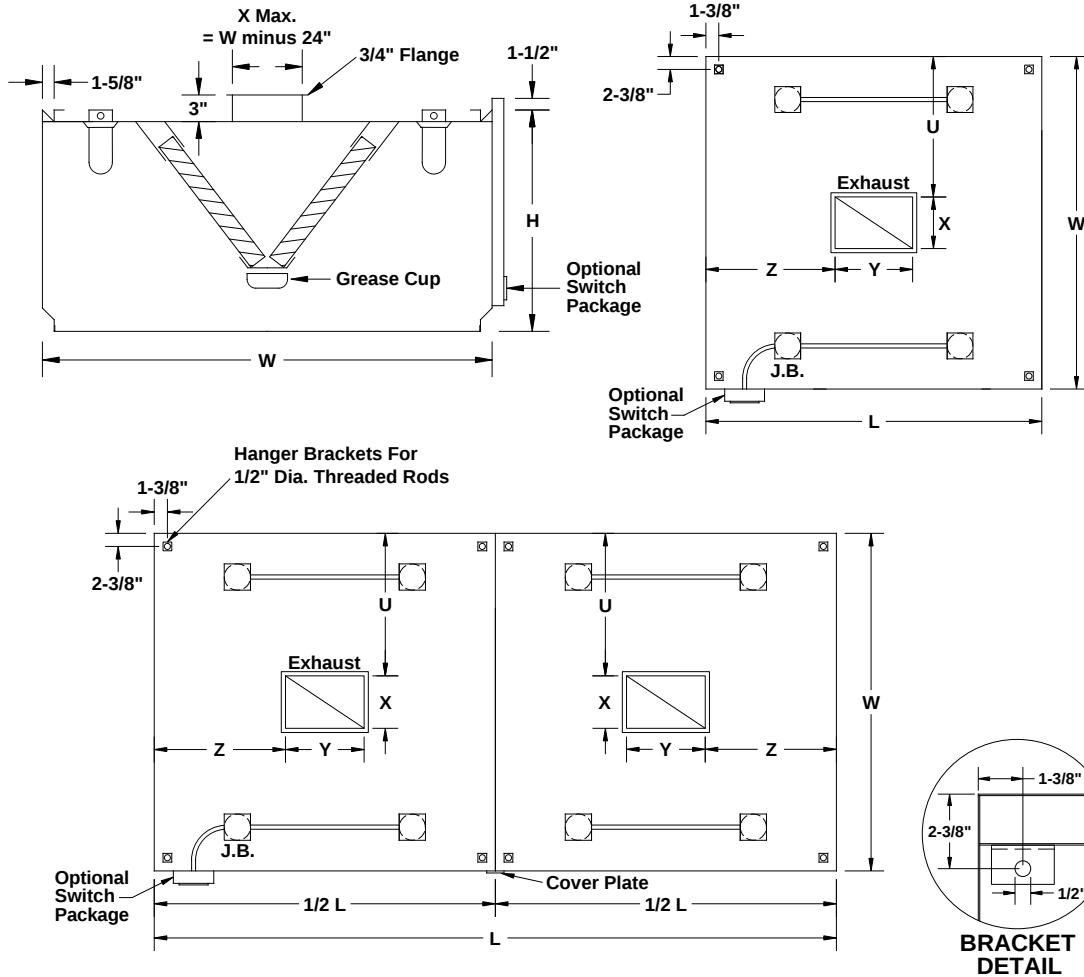

| Quantity |  | Model |  | ① Material | ② Gauge | Hood Dimensions |   |   | ③ Number of Lights | Bottom Edge Type |
|----------|--|-------|--|------------|---------|-----------------|---|---|--------------------|------------------|
|          |  |       |  |            |         | L               | W | H |                    |                  |
|          |  |       |  |            |         |                 |   |   |                    |                  |
|          |  |       |  |            |         |                 |   |   |                    |                  |
|          |  |       |  |            |         |                 |   |   |                    |                  |

| ④ Factory Cut Exhaust Opening |   |   |   | ⑤ Filters |          |          |      | ⑥ Finish | ⑦ Side Skirts | Other Options | Tag |
|-------------------------------|---|---|---|-----------|----------|----------|------|----------|---------------|---------------|-----|
| U                             | X | Y | Z | Type      | Material | Quantity | Size |          |               |               |     |
|                               |   |   |   |           |          |          |      |          |               |               |     |
|                               |   |   |   |           |          |          |      |          |               |               |     |
|                               |   |   |   |           |          |          |      |          |               |               |     |

- ① Type 304 or 430 stainless steel.  
 ② 18 ga. is standard: other gauges available.  
 ③ Standard is 100 watt vapor proof incandescent U.L. Listed for use on grease exhaust hood.  
 ④ Two collars required on hood sections over 12' long.  
 ⑤ Aluminum baffle type U.L. Classified filters standard.



- ☐ Without Exhaust Fire Damper  
☐ With Exhaust Fire Damper

- ⑥ #3 polish standard.  
 ⑦ Advise if one or both sides. Make a sketch.  
 ⑧ Optional exhaust air fire damper.  
 ⑨ Optional switch package with surface mounted stainless steel cover and junction box on top of hood. (Fan switch with illuminated toggle).  
☐ Hood mounted ☐ Loose for wall mounting  
 Number of light switches \_\_\_\_\_  
 Number of fan switches \_\_\_\_\_ Voltage \_\_\_\_\_ 115V \_\_\_\_\_ 24V



To maintain our policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

| Project    | Location |          |  |
|------------|----------|----------|--|
| Engineer   |          |          |  |
| Architect  | Dwg. No. | SD-KB-SI |  |
| Contractor | Date     | 12/17    |  |



**KEES INCORPORATED**  
 400 S. Industrial Dr.  
 Elkhart Lake, WI 53020  
 Phone: (920) 876-3391  
 Fax: (920) 876-3065  
 Website: www.kees.com