


MODEL KF High Moisture Hood

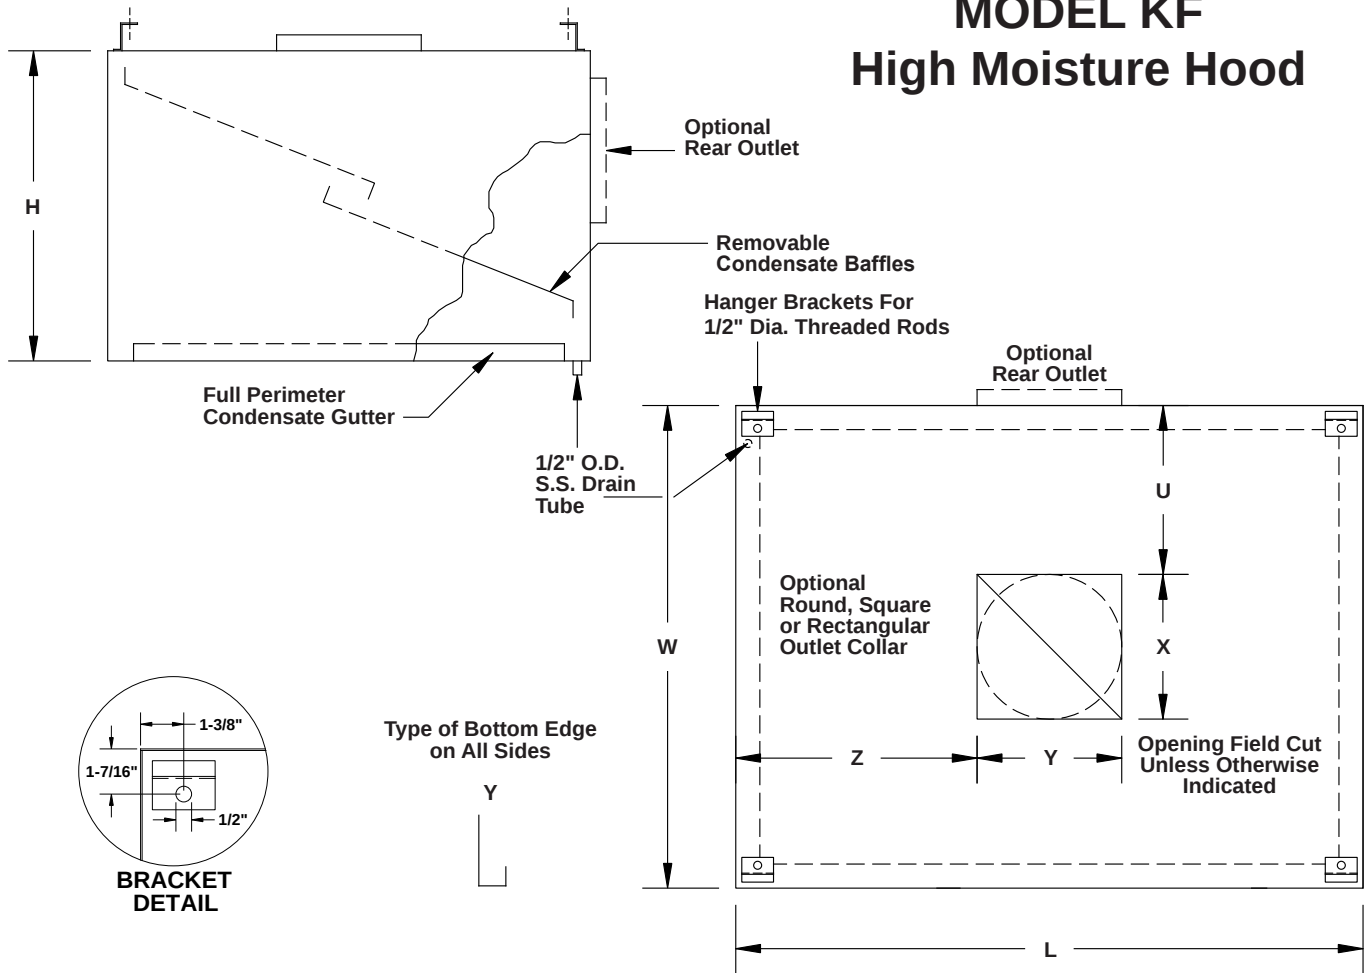

Quantity	① Material	② Material Gauge	Hood Dimensions		
			L	W	H

③ Factory Cut Opening				④ Drain Location	⑤ Finish	Other Options	Tag
U	X	Y	Z				

- ① Stainless (standard); Aluminum (optional)
 ② 18 ga. is standard; other gauges available.
 ③ Includes 1 inch high collar welded on.
 ④ Indicate where drain is required.

- ⑤ #3 polish standard.
 ⑥ Optional switch package with stainless steel raceway and junction box. (Fan switch with illuminated toggle).
☐ Hood mounted ☐ Loose for wall mounting
 Number of fan switches _____ Voltage _____ 115V _____ 24V



To maintain KEES' policy of continuous product development, we reserve the right to change prices, specifications, ratings and dimensions without notice or obligation.

Project				Location		
Engineer						
Architect				Dwg. No.	SD-KF	
Contractor				Date	03/16	



KEES INCORPORATED
 400 S. Industrial Dr.
 Elkhart Lake, WI 53020
 Phone: (920) 876-3391
 Fax: (920) 876-3065
 Website: www.kees.com